

# 0505-0569G

**RoHS Compliant\***


TURNS RATIO: (1-2 : 3-4) = 1:1  
 DC RESISTANCE 1-2 & 3-4: < 0.5 ohms each  
 INDUCTANCE, DRY 1-2: 1.1 - 1.8mH  
 INDUCTANCE WITH 45mADC >1.0 mH  
 LEAKAGE INDUCTANCE: < 1.0  $\mu$ H  
 DIRECT CAPACITANCE: < 50pF  
 DISTRIBUTED CAPACITANCE: < 25pF  
 DIELECTRIC STRENGTH: 3000 VRMS  
 OPERATING TEMP: 0 to 85 ° C

DESIGNED TO MEET THE REQUIREMENTS OF  
 UL1950, UL916, UL508 & CSA22.2 No. 1950

THREE LAYERS OF INSULATION BETWEEN  
 PRIMARY AND SECONDARY WINDINGS

\*New units marked with a green pin 1 indicator dot are RoHS Compliant construction, according to the definitions and restrictions given by The European Parliament (Directive 2002/95/EC) and The Council of January 27, 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

DATA SUBJECT TO CHANGE WITHOUT NOTICE

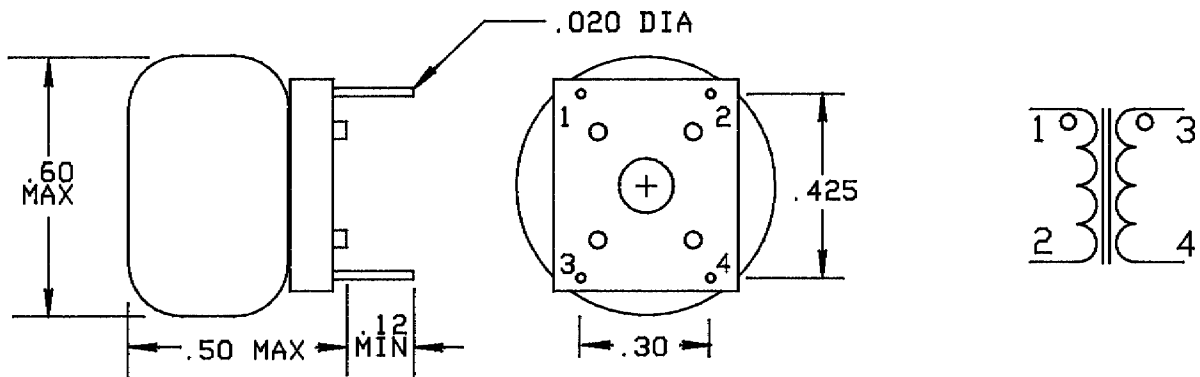

TOLERANCES UNLESS OTHERWISE SPECIFIED +/- .010"