


0505-0615

TURNS RATIO: (1-3 : 4-6) = 1:1
 DC RESISTANCE 1-3 & 4-6: < 0.25 ohms each
 INDUCTANCE, DRY 1-3: = 2.6mH \pm 20%
 LEAKAGE INDUCTANCE: < 5.0 μ H
 DIRECT CAPACITANCE: < 100pF
 DISTRIBUTED CAPACITANCE: < 100pF
 DIELECTRIC STRENGTH: 3000 VRMS
 OPERATING TEMP: 0 to 85 ° C

DESIGNED TO MEET THE REQUIREMENTS OF
 UL1950, UL916, UL508 & CSA22.2 No. 1950

THREE LAYERS OF INSULATION BETWEEN
 PRIMARY AND SECONDARY WINDINGS

DATA SUBJECT TO CHANGE WITHOUT NOTICE

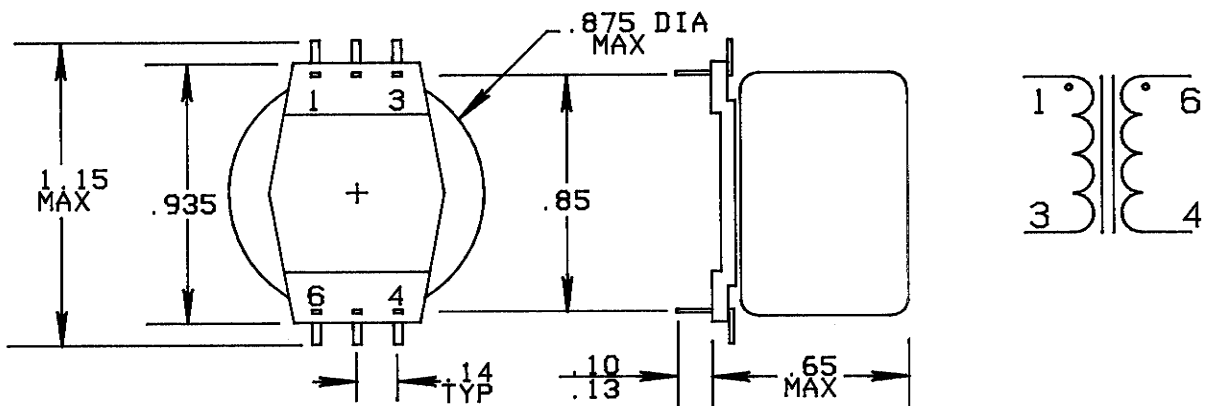

TOLERANCES UNLESS OTHERWISE SPECIFIED +/- .010"