


# 0505-0649

TURNS RATIO: (1-2 : 3-4) = 2:1  
 DC RESISTANCE: 1-2 < 2.0 ohm ; 3-4: < 1.0 ohm  
 INDUCTANCE, DRY 1-2: 4.4mH min. 7.2 max.  
 INDUCTANCE WITH 20 mADC: 4.0 mH min.  
 LEAKAGE INDUCTANCE 1-2: < 3.0  $\mu$ H  
 DIRECT CAPACITANCE: < 50pF  
 DISTRIBUTED CAPACITANCE: < 50pF  
 DIELECTRIC STRENGTH: 1000 VRMS  
 OPERATING TEMP: 0 to 85 ° C

DATA SUBJECT TO CHANGE WITHOUT NOTICE

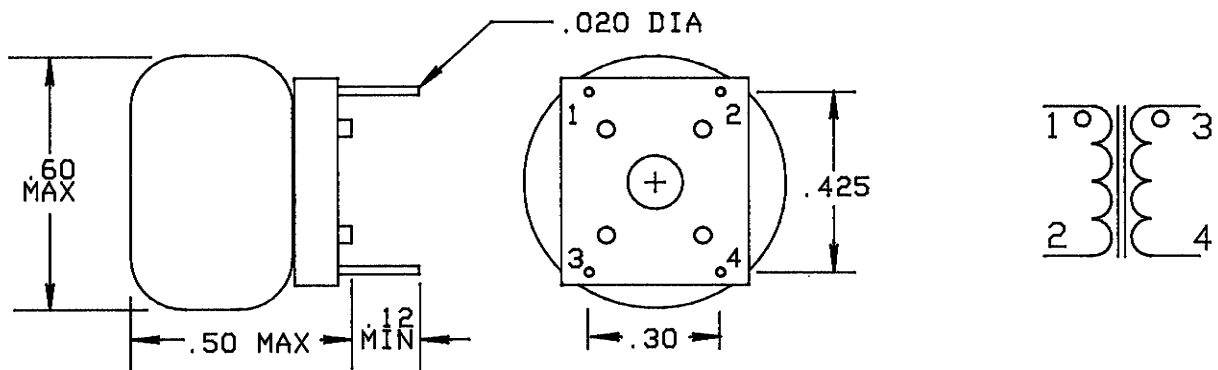

TOLERANCES UNLESS OTHERWISE SPECIFIED +/- .010"