


# 0505-0660

TURNS RATIO: (1-2 : 3-4) = 1:1  
 DC RESISTANCE 1-2 & 3-4: < 0.5 ohms each  
 INDUCTANCE, DRY 1-2: 1.1 - 1.8mH  
 INDUCTANCE WITH 45mADC >1.0 mH  
 LEAKAGE INDUCTANCE: < 1.0  $\mu$ H  
 DIRECT CAPACITANCE: < 50pF  
 DISTRIBUTED CAPACITANCE: < 25pF  
 DIELECTRIC STRENGTH: 4000 VRMS  
 OPERATING TEMP: 0 to 85 ° C

DESIGNED TO MEET THE REQUIREMENTS OF  
 UL1950, UL916, UL508 & CSA22.2 No. 1950

THREE LAYERS OF INSULATION BETWEEN  
 PRIMARY AND SECONDARY WINDINGS

DATA SUBJECT TO CHANGE WITHOUT NOTICE

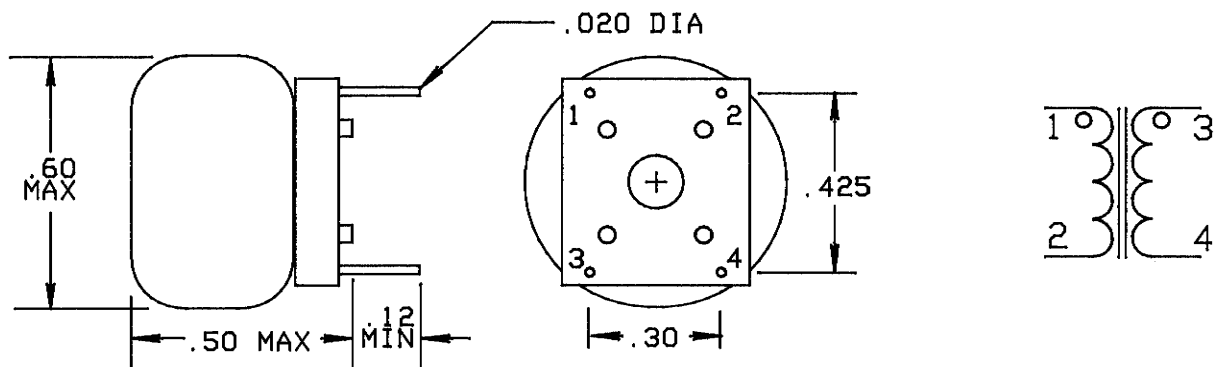

TOLERANCES UNLESS OTHERWISE SPECIFIED +/- .010"