


# 0505-0662

Surface Mount Transformer Package  
 For  
 78 Kbps Twisted Pair Applications

Turns Ratio Pri to Sec: 1 to 2  
 Primary DC Resistance: 5.5 ohms max.  
 Secondary DC Resistance: 11.3 ohms max.  
 Primary Inductance: 35-60 mH  
 Dielectric Strength: 1500 VRMS  
 Operating Temp: 0 to 85 ° C

DATA SUBJECT TO CHANGE WITHOUT NOTICE

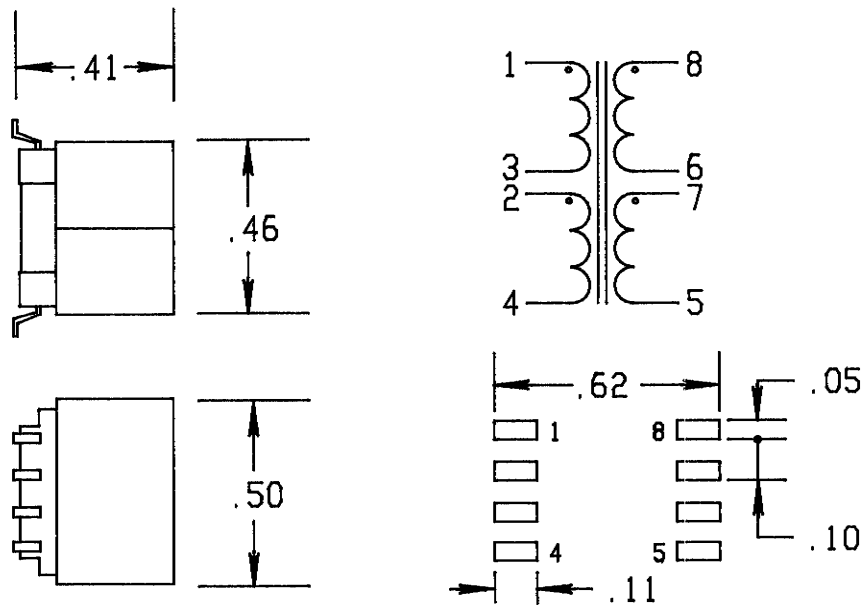

TOLERANCES UNLESS OTHERWISE SPECIFIED .010'