


# 0505-0666

URNS RATIO: (1-2 : 3-4) = 2:1  
DC RESISTANCE 1-2 < 1.0 ohm  
DC RESISTANCE 3-4 < 0.5 ohm  
INDUCTANCE, DRY 3-4: > 1.2mH  
INDUCTANCE WITH 25 mADC 3-4: >1 mH  
LEAKAGE INDUCTANCE 1-2: < 3.0  $\mu$ H  
DIRECT CAPACITANCE: < 50pF  
DISTRIBUTED CAPACITANCE: < 25pF  
DIELECTRIC STRENGTH: 1000 VRMS  
OPERATING TEMP: -40 to 85 ° C

DATA SUBJECT TO CHANGE WITHOUT NOTICE

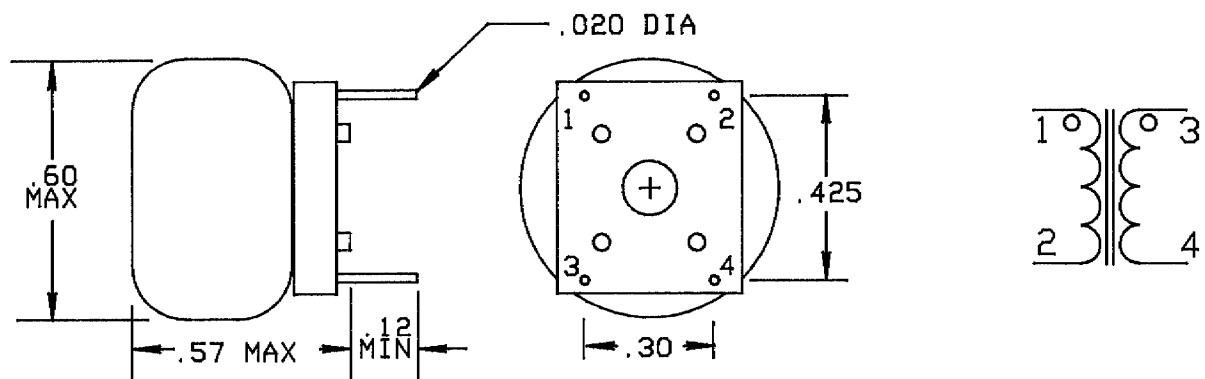

TOLERANCES UNLESS OTHERWISE SPECIFIED +/- .010"