


# 0505-0669

URNS RATIO: (1-2 : 3-4) = 1:1  
DC RESISTANCE 1-2 & 3-4: < 0.5 ohms each  
INDUCTANCE, DRY 1-2: > 1.2mH  
LEAKAGE INDUCTANCE: < 1.0  $\mu$ H  
DIRECT CAPACITANCE: < 50pF  
DISTRIBUTED CAPACITANCE: < 25pF  
DIELECTRIC STRENGTH: 3000 VRMS  
OPERATING TEMP: -40 to 85 ° C

DESIGNED TO MEET THE REQUIREMENTS OF  
UL1950, UL916, UL508 & CSA22.2 No. 1950

THREE LAYERS OF INSULATION BETWEEN  
PRIMARY AND SECONDARY WINDINGS

DATA SUBJECT TO CHANGE WITHOUT NOTICE

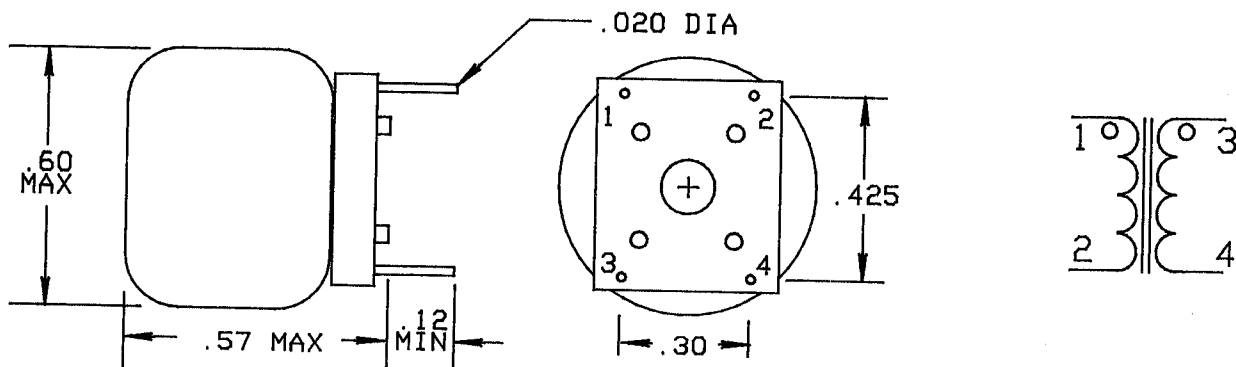

TOLERANCES UNLESS OTHERWISE SPECIFIED +/- .010'