


# 0505-0703G

## New!! Lead Free Construction!!

Surface Mount Transformer Package, RoHS Compliant

Primary DC Resistance (1-4): 5.3 ohms max.  
 Secondary DC Resistance (7-10): 10.1 ohms max.  
 Turns Ratio Pri. to Sec. : 1 (split) to 2 (split)  
 Primary Inductance: 47.5 mH  $\pm 25\%$   
 Dielectric Strength: 1500 VRMS for 1 minute  
 Operating Temp.: 0 to +85 ° C  
 Storage Temp.: -40 to 105 ° C

DATA SUBJECT TO CHANGE WITHOUT NOTICE

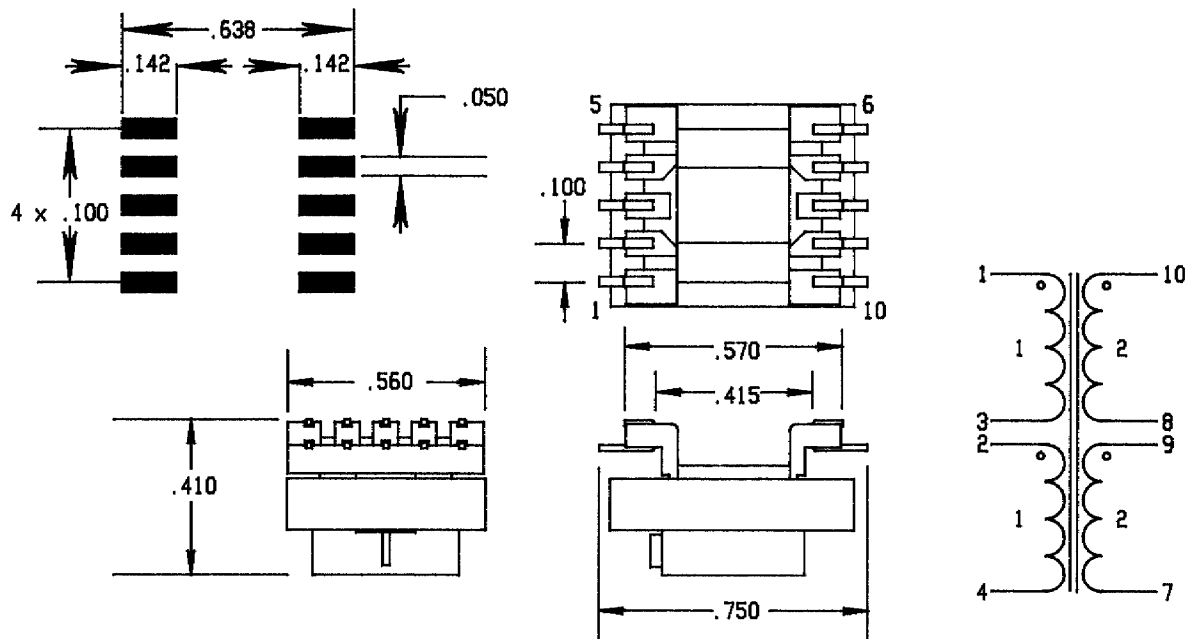

TOLERANCES UNLESS OTHERWISE SPECIFIED .010"