


0505-0806

Surface Mount Transformer Package

Primary DC Resistance (1-4 or 2-5): 2.0 ohms max. each
 Secondary DC Resistance (6-9 or 7-10): 2.5 ohms max. each
 Turns Ratio Pri. to Sec. : 1 (split) to 1 (split)
 Primary Inductance: 47.5 mH \pm 25%
 Dielectric Strength: 1500 VRMS for 1 minute
 Operating Temp.: 0 to +85 ° C
 Storage Temp.: -40 to 105 ° C

DATA SUBJECT TO CHANGE WITHOUT NOTICE

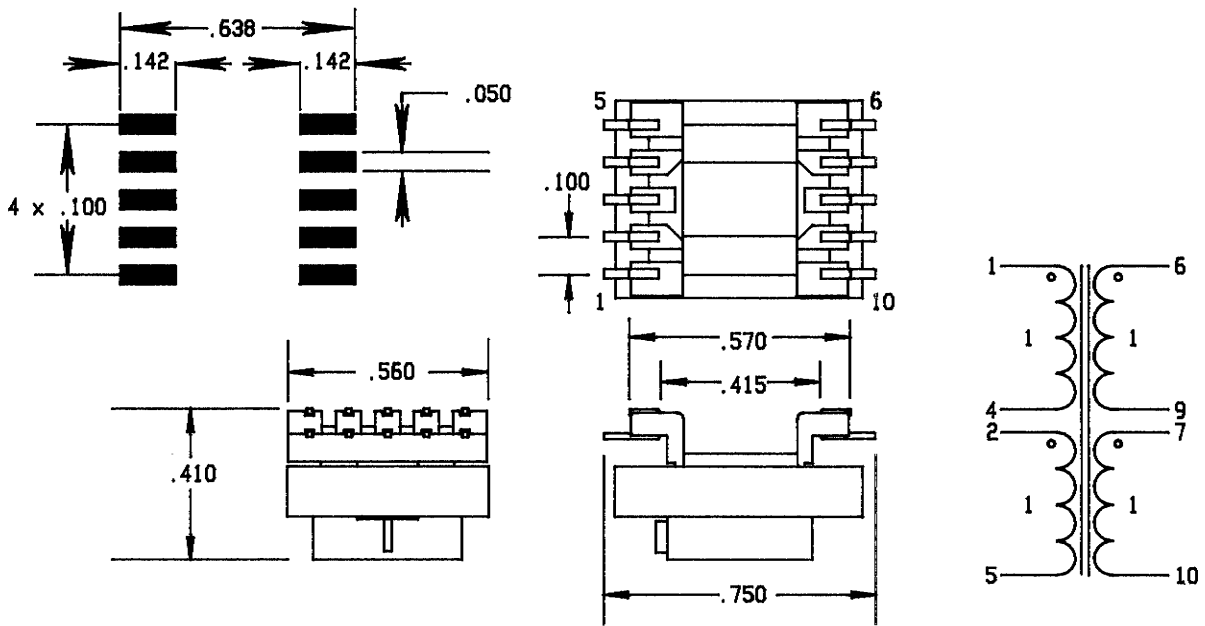

TOLERANCES UNLESS OTHERWISE SPECIFIED .010"